


Bus Bar Clamps

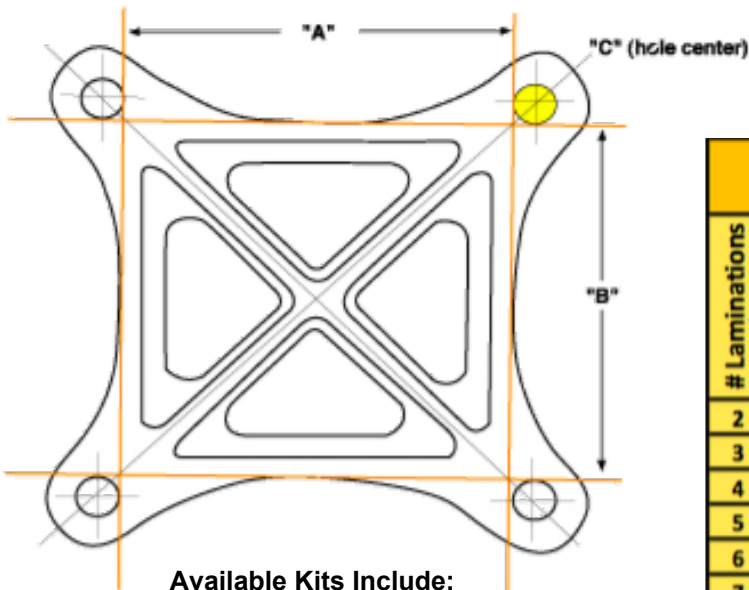

Available Kits Include:
2-Bus Bar Clamps, 4-GR.8 Bolts, 4-Nuts

Bus Bar Clamps and Kits

Part Number	Est. Wt.	"A"	"B"	"C"
DA-750426	3.1 lbs	4.00	4.00	1/2-13
DA-750427	3.3 lbs	4.00	6.00	1/2-13
DA-750428	3.6 lbs	6.00	6.00	1/2-13
DA-750429	3.6 lbs	4.00	8.00	5/8-11
DA-750430	7.1 lbs	6.00	8.00	5/8-11
DA-750431	7.8 lbs	8.00	8.00	5/8-11
DA-750426-K	7 lbs	4.00	4.00	1/2-13
DA-750427-K	7.5 lbs	4.00	6.00	1/2-13
DA-750428-K	8 lbs	6.00	6.00	1/2-13
DA-750429-K	8 lbs	4.00	8.00	5/8-11
DA-750430-K	15 lbs	6.00	8.00	5/8-11
DA-750431-K	17 lbs	8.00	8.00	5/8-11

Bus Bar Clamp Bolt Length Table

# Laminations	Clamp Sizes: 4x4 4x6 6x6		Clamp Sizes: 4x8 6x8 8x8	
	0.25" Copper		0.50" Copper	
	0.25" Copper	0.50" Copper	0.25" Copper	0.50" Copper
2	2.75"	3.275"	3.50"	4.00"
3	3.00"	3.750"	3.75"	4.50"
4	3.25"	4.250"	4.00"	5.00"
5	3.50"	4.750"	4.25"	5.50"
6	3.75"	5.250"	4.50"	6.00"
7	4.00"	5.750"	4.75"	6.50"
8	4.25"	6.250"	5.00"	7.00"
9	4.50"	6.750"	5.25"	7.50"
10	4.75"	7.250"	5.50"	8.00"
11	5.00"	7.750"	5.75"	8.50"
12	5.25"	8.250"	6.00"	9.00"
13	5.50"	8.750"	6.25"	9.50"
14	5.75"	9.250"	6.50"	10.00"
15	6.00"	9.750"	6.75"	10.50"
16	6.25"	10.250"	7.00"	11.00"
17	6.50"	10.750"	7.25"	11.50"
18	6.75"	11.250"	7.50"	12.00"
19	7.00"	11.750"	7.75"	12.50"
20	7.25"	12.250"	8.00"	13.00"

Rec. Torque Specifications:
40 ft. lbs.

Rec. Torque Specifications:
40 ft. lbs.

TYPICAL CHEMICAL ANALYSIS* AISI C-1045


MINIMUM KEEL BLOCK TEST BAR PROPERTIES

TYPICAL HARDNESS

C%	MN%	SI%	P% Max.	S% Max.	Ultimate Strength PSI	Yield Strength PSI	Elong. In 2" %	Red. In Area	Heat Treatment	Brinell Hardness
0.45	0.7	0.45	0.05	0.05	90,000	60,000	20	40	Q&T	180-230

*Medium Carbon Steel – Investment castings produced from these steels are readily machineable, readily welded, and have excellent Ductility.

Finish Required – Hot Dip Galvanized

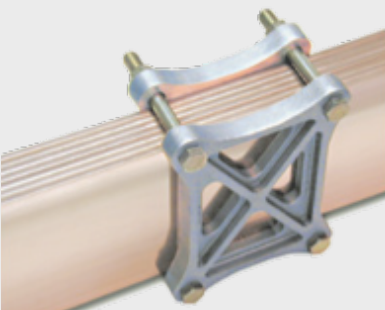

23 Mansfield Industrial Parkway
Mansfield, OH 44903

